
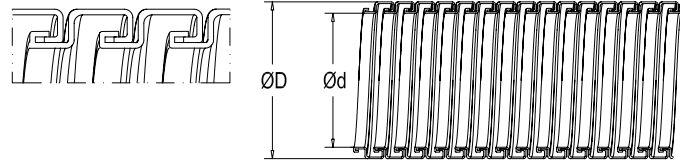


## RCCN 日成MCLS型不锈钢金属软管 Liquid-Tight Metal Flexible Conduit

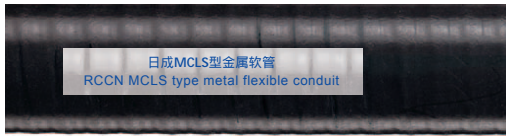

产品材质:(内层):不锈钢带。(外层):PVC(黑色抗紫外线,防老化)

产品认证:欧洲CE,欧洲环保RoHS

防火等级:UL94V-0,低烟无毒 颜色种类:黑色或灰色

工作温度:-30 到+85 ,瞬间可耐热达100

产品特性:1软管有极佳之防水,绝缘性,抗拉性

2表面加厚层PVC被覆,外表平滑,且PVC塑料添加防火阻燃剂,并加抗UV紫外线和防止老化作用之成份。

3结构为反扣型增加抗拉强度,不容易折断或变形。

4具超柔软与极佳弯曲性能,内部平滑构造在穿引电线时极容易。

应用领域:各种昂贵设备,发电厂,化工设备,输电系统,,基地台架设,及屋外露出部分之配线保护。

使用方法:先将电线穿入管内,再配合金属软管固定头即可。

用途:保护电线电缆以及达到绝缘,防水,并可增进线缆弯曲美观。

交期:1-2周,有起订量要求。环保型软管型号例:MCLS-06B/ROHS

Material:(inner):stainless steel tape  
(outer):PVC(black,UV resistant)

Certificates:CE, RoHS

Fireproof class:UL94V-2,low smoking,poison free

Color:black, gray

Work T.:-30 to +85 ,100 in a short time

Products Characteristics:1.good waterproof,insulated,retension

2.PVC wrapped , PVC is UV and inflammation resistant

3.uneasy to break and construction changing, for its special design

4.smooth inside, make the wire and cable install easily

Use domain:railway,communicate project,air-dondition,machines.roboticized equipments,power plant ships and so on

Use way:insert the cables into the conduit, then fix the correct connectors.

Delivery time:1-2 weeks,come with MOQ

RoHS approved part no. like:MCLS-06B/ROHS


单位/Unit:mm

型号 Item No.		规格 Trade Sizes		内径 I.D. d	外径 O.D. D	弯曲半径 Bending Radius mm±10%	配套金属头 Suitable metal connector NBG	包装 Packing M
黑色Black	灰色Gray	公制 Metric ø	英制 British					
MCLS2-03B	MCLS2-03G	ø 10	1/4"	10.0±0.3	15.0±0.5	50	NBG-03	50M
MCLS2-04B	MCLS2-04G	ø 13	3/8"	12.5±0.3	17.5±0.5	60	NBG-04	50M
MCLS2-05B	MCLS2-05G	ø 16	1/2"	15.5±0.3	21.2±0.5	75	NBG-05	50M
MCLS2-06B	MCLS2-06G	ø 20	3/4"	20.0±0.3	26.0±0.5	100	NBG-06	30M
MCLS2-08B	MCLS2-08G	ø 25	1"	25.0±0.3	31.5±0.5	100	NBG-08	30M
MCLS2-10B	MCLS2-10G	ø 32	1 1/4"	32.0±0.3	39.5±0.5	135	NBG-10	20M
MCLS2-12B	MCLS2-12G	ø 38	1 1/2"	38.0±0.3	45.8±0.5	160	NBG-12	20M
MCLS2-16B	MCLS2-16G	ø 51	2"	51.0±0.3	60.0±0.5	190	NBG-16	15M

## RCCN 日成MCR-EX型防爆金属软管 Non-Jacket Metal Flexible Conduit



单位/Unit:mm

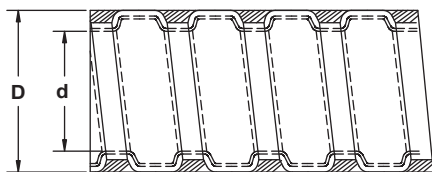

产品材质:(内层):热浸镀锌钢板及特殊绝缘处理。

(中层):PVC(黑色抗紫外线,防老化),(外层):不锈钢带编织网。

产品认证:欧洲CE,欧洲环保RoHS

防火等级:UL94V-0,低烟无毒

产品特性:强度高,不易变形,弯曲性差。

应用领域:各种高温环境或防爆设备之配线保护。

使用方法:先将电线穿入管内,再配合金属软管固定头即可。

用途:保护电线电缆以及达到绝缘,防水,并可增进线缆弯曲美观。

交期:2-4周,有起订量要求。

Material:(inner):zinc coated steel, special insulated processed.

(middle):PVC(black,UV resistant).(outer):stainless steel tape sleeve

Certificates:CE, RoHS

Products Characteristics:Economic,soft and perfect flexible, easy to install wires or cables

Use domain:protect cable or wired in house, equipments and so on.

Use way:insert the cables into the conduit

Functions:protect wires and cables , insulated,waterproof

Delivery time:2-4 weeks,come with MOQ

型号 Item No.	规格		内径 I.D. d	外径 O.D. D	配套金属头 Suitable metal connector NBG	包装 Packing M
	公制 Metric ø	英制 British				
MCR-03EX	ø 10	1/4"	10.0±0.3	15.5±0.5	NBG-03	50M
MCR-04EX	ø 13	3/8"	12.5±0.3	17.5±0.5	NBG-04	50M
MCR-05EX	ø 16	1/2"	15.5±0.3	21.5±0.5	NBG-05	50M
MCR-06EX	ø 20	3/4"	20.0±0.3	26.8±0.5	NBG-06	25M
MCS-08EX	ø 25	1"	25.0±0.3	33.5±0.5	NBG-08	25M
MCS-10EX	ø 32	1 1/4"	32.0±0.3	42.0±0.5	NBG-10	10M
MCS-12EX	ø 38	1 1/2"	38.0±0.3	48.2±0.5	NBG-12	10M
MCS-16EX	ø 51	2"	50.0±0.3	61.3±0.5	NBG-16	5M