


RCCN 日成KS/S型卷式结束带 KS/S Spiral Wrapping Bands



柔软型,品质优良



包装说明:可按要求包装长度,有起订量要求./Packing:special,come with MOQ 单位/Unit:mm

| 型号 Item No. | | 内径 Inner dia.D | 外径 Outer dia.D1 | 螺距 Screw W | 结束范围 Wrapping range | 包装 Packing |
|-------------------------|----------|----------------------|-----------------------|------------------|------------------------|---------------|
| 半透明 halftransparency | 黑色/Black | | | | | |
| KS-4W/S | KS-4B/S | 3.5 | 4.5 | 4-5 | 3-10 | 50M |
| KS-6W/S | KS-6B/S | 4.8 | 6.0 | 6-7 | 4-25 | 50M |
| KS-8W/S | KS-8B/S | 6.5 | 8.0 | 8-10 | 6-30 | 50M |
| KS-10W/S | KS-10B/S | 8.5 | 10 | 11-12 | 7.5-30 | 25M |
| KS-12W/S | KS-12B/S | 10.5 | 12 | 12-13 | 9-32 | 25M |
| KS-15W/S | KS-15B/S | 13 | 15 | 16-17 | 12-35 | 25M |
| KS-19W/S | KS-19B/S | 16.5 | 19 | 19-20 | 15-50 | 10M |
| KS-24W/S | KS-24B/S | 21.5 | 24 | 29-31 | 20-100 | 10M |
| KS-30W/S | KS-30B/S | 27.0 | 30 | 30.0-32 | 26-130 | 10M |

材 质:环保无卤PE透明,黑色,

结束方法:剪下所需长度,以扎线带固定一端,再将卷束带依顺时针方向卷绕即可.

结 束 力:本产品若使用变更时拆下容易,再重新使用原有的卷束带时其卷束力仍然不变.

用 途:结束电线并有保护电线免于割伤及绝缘.


Material:Rohs approved halogen free PE,black.

Usage : Cut it in suitable length , fixed with cable tie at one side then wrap it easily


Fuctions : protect cables and wires, good insulation.

可定制其它颜色,有起订量要求./Other colors come with MOQ.

RCCN 日成KSV0/S型阻燃卷式结束带 KSV0 Spiral Wrapping Bands

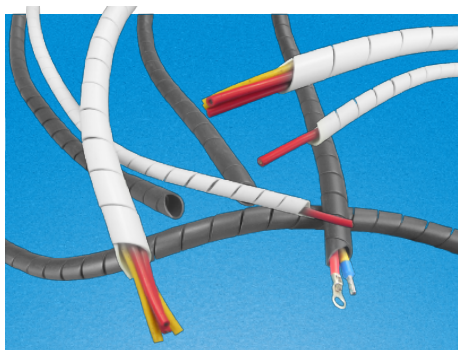

柔软型,品质优良



包装说明:可按要求包装长度,有起订量要求./Packing:special,come with MOQ 单位/Unit:mm

| 型号 Item No. | | 内径 Inner dia.D | 外径 Outer dia.D1 | 螺距 Screw W | 结束范围 Wrapping range | 包装 Packing |
|-------------|------------|----------------------|-----------------------|------------------|------------------------|---------------|
| 乳白色 White | 黑色 Black | | | | | |
| KS-4WV0/S | KS-4BV0/S | 3.5 | 4.5 | 4-5 | 3-10 | 50M |
| KS-6WV0/S | KS-6BV0/S | 4.8 | 6.0 | 6-7 | 4-25 | 50M |
| KS-8WV0/S | KS-8BV0/S | 6.5 | 8.0 | 8-10 | 6-30 | 50M |
| KS-10WV0/S | KS-10BV0/S | 8.5 | 10 | 11-12 | 7.5-30 | 25M |
| KS-12WV0/S | KS-12BV0/S | 10.5 | 12 | 12-13 | 9-32 | 25M |
| KS-15WV0/S | KS-15BV0/S | 13 | T15 | 16-17 | 12-35 | 25M |
| KS-19WV0/S | KS-19BV0/S | 16.5 | 19 | 19-20 | 15-50 | 10M |
| KS-24WV0/S | KS-24BV0/S | 21.5 | 24 | 29-31 | 20-100 | 10M |
| KS-30WV0/S | KS-30BV0/S | 27.0 | 30 | 30.0-32 | 26-130 | 10M |

材 质:环保阻燃PE改性制成.

用 途:结束电线并有保护电线免于割伤及绝缘,适合环境有阻燃要求.


说 明:环保型为选购品,有起订量要求,颜色黑略带灰.

Material:Rohs approved PE

Use:protect cables and wires, good insulation,fireproof

Note:Rohs approved products come with MOQ

RCCN 日成KP型开口式结束带 KP Split Wrapping Band

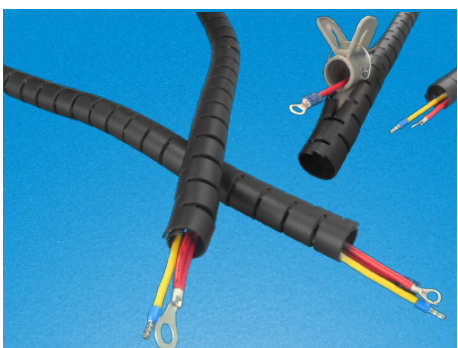

单位/Unit:mm

| 型号 Item No. | | | 厚度 Thickness B | 外径 Outer dia. A | 螺距 Screw C | 结束范围 Wrapping range | 包装 Packing |
|-------------|---------|--------------------------------|----------------------|-----------------------|------------------|------------------------|---------------|
| 黑色/Black | 灰色/Grey | 配套工具 Fitting tools KT-15 | 0.8 | 15 | 13 | 10 | 5M |
| KP-15B | KP-15G | KT-15 | 0.8 | 15 | 13 | 10 | 5M |
| KP-20B | KP-20G | KT-20 | 0.9 | 20 | 15 | 16 | 5M |
| KP-25B | KP-25G | KT-25 | 1.3 | 25 | 18 | 22 | 5M |
| KP-32B | KP-32G | KT-32 | 1.3 | 32 | 23 | 27 | 5M |

材 质:PP黑色.可定制其它颜色,绿色:KP-15G,蓝色:KP-15E

结束方法:剪下所需长度,配合专用工具,一手压在上端,将工具向下拉,便可瞬间完成整线工作.

结 束 力:本产品若使用变更时拆下容易,再重新使用原有的卷束带时其卷束力仍然不变.

用 途:美观安全结束电线并有保护电线免于割伤及绝缘.

Material:PP black.

Usage : Cut it in suitable length , fixed with cable tie at one side then wrap it easily

Fuctions : protect cables and wires, good insulation.

